

FIG. 1

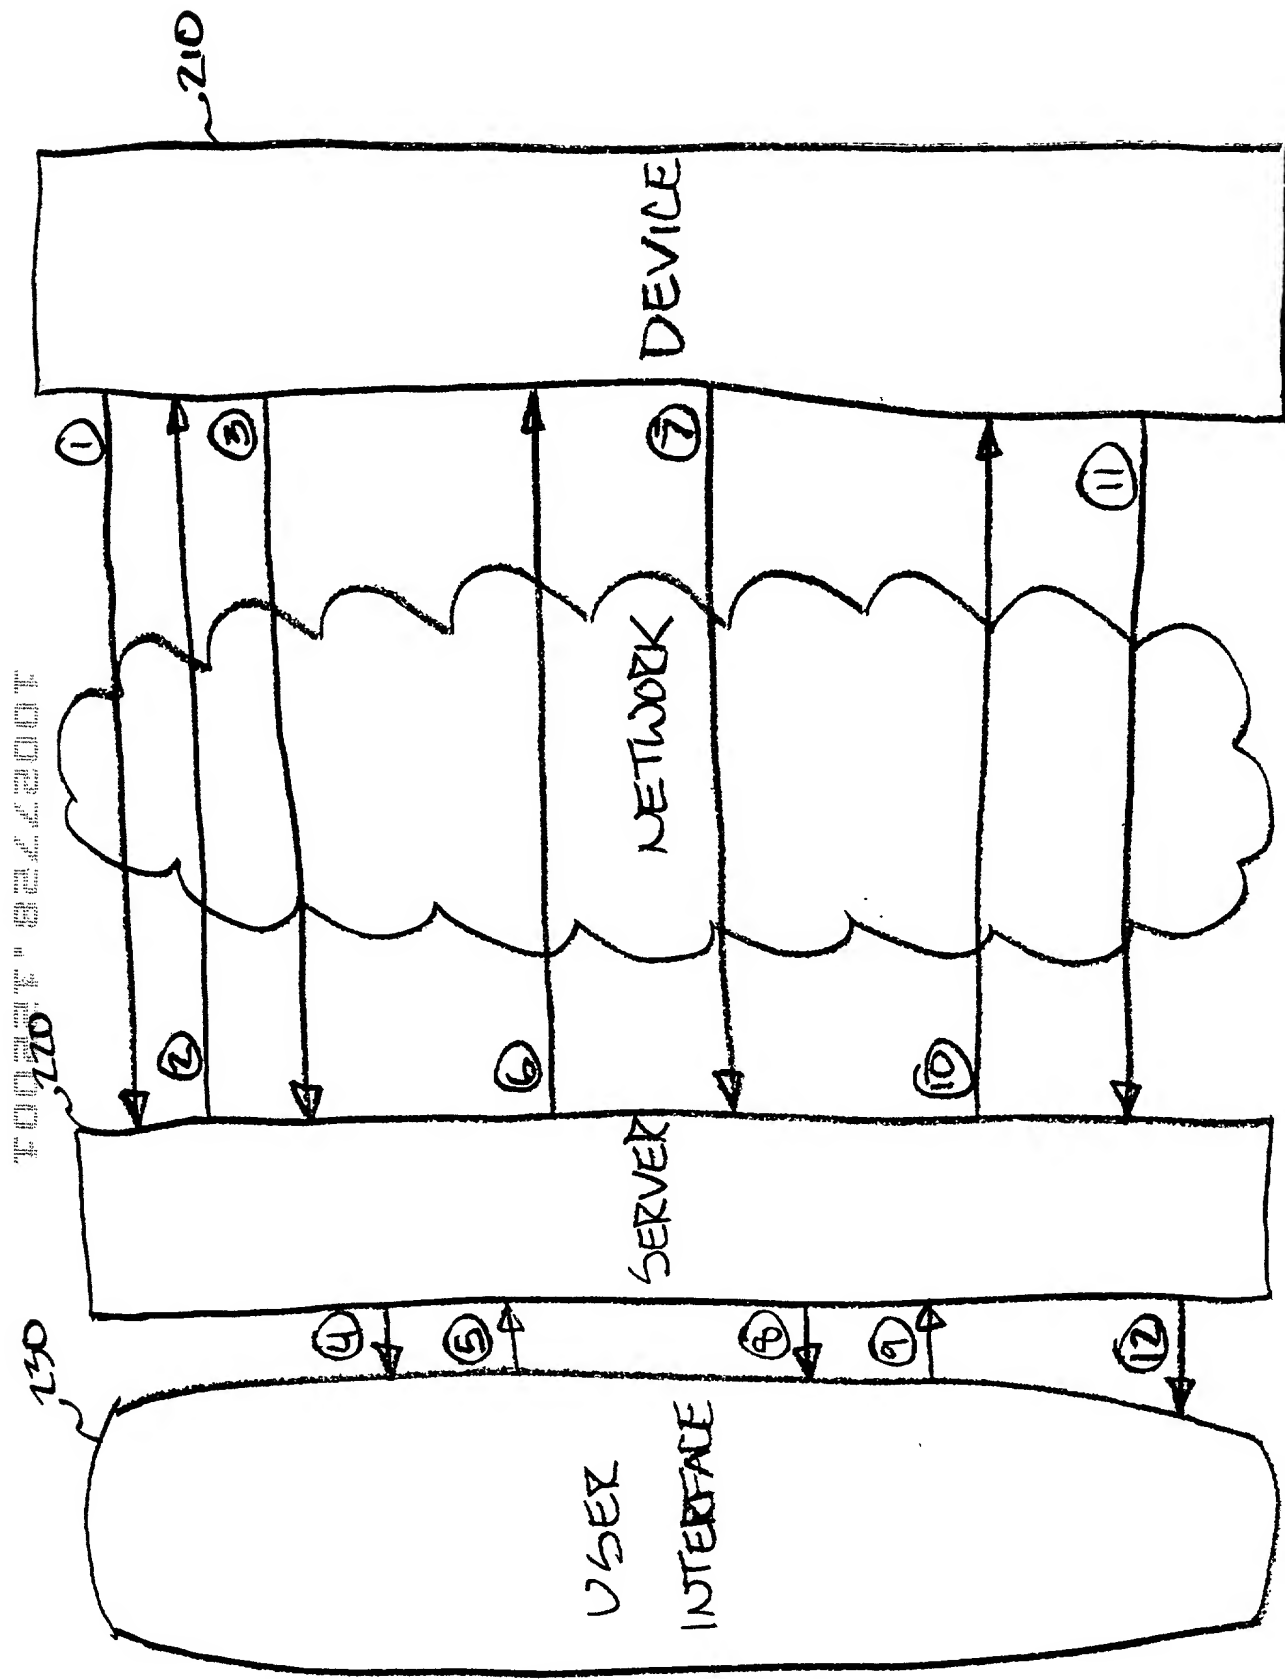


FIG. 2

AN INDICATION FROM A DEVICE IS RECEIVED THROUGH A NETWORK ~310

IF IT IS DETERMINED FROM THE INDICATION THAT THE DEVICE IS IN A STATE IN WHICH A FIRST SYSTEM HAS NOT BEEN LOADED FOR THE DEVICE, THEN THE DEVICE IS INSTRUCTED THROUGH THE NETWORK TO LOAD THE FIRST SYSTEM ~320

IF AN INDICATION THAT THE FIRST SYSTEM HAS BEEN LOADED IS RECEIVED THROUGH THE NETWORK FROM THE DEVICE, THEN IT IS INDICATED THROUGH A USER INTERFACE THAT THE DEVICE IS IN A STATE IN WHICH THE DEVICE IS AVAILABLE TO LOAD AN OPERATING SYSTEM SELECTABLE THROUGH THE USER INTERFACE ~330

FIG. 3

IF AN OPERATING SYSTEM IS SELECTED,
THEN THE DEVICE IS INSTRUCTED
THROUGH THE NETWORK TO LOAD
THE OPERATING SYSTEM

~410

IF AN INDICATION THAT THE OPERATING
SYSTEM HAS BEEN LOADED IS
RECEIVED THROUGH THE NETWORK FROM
THE DEVICE, THEN IT IS INDICATED
THROUGH THE USER INTERFACE THAT
THE DEVICE IS IN A STATE IN WHICH
AN OPERATING SYSTEM HAS BEEN
LOADED FOR THE DEVICE AND THE
OPERATING SYSTEM THAT HAS BEEN
LOADED FOR THE DEVICE

~420

FIG. 4

1002728-12001

IF THE INDICATION THAT THE OPERATING SYSTEM HAS BEEN LOADED IS RECEIVED, THEN IT IS INDICATED THROUGH THE USER INTERFACE THAT THE DEVICE IS IN A STATE IN WHICH THE DEVICE IS AVAILABLE TO RETURN TO THE STATE IN WHICH AN OPERATING SYSTEM HAS NOT BEEN SELECTED FOR THE DEVICE ~510

IF THERE IS AN INDICATION TO RETURN THE DEVICE TO THE STATE IN WHICH AN OPERATING SYSTEM HAS NOT BEEN SELECTED FOR THE DEVICE, THEN THE DEVICE IS INSTRUCTED THROUGH THE NETWORK TO LOAD THE FIRST SYSTEM ~520

IF AN INDICATION THAT THE FIRST SYSTEM HAS BEEN LOADED IS RECEIVED THROUGH THE NETWORK FROM THE DEVICE, THEN IT IS INDICATED THROUGH THE USER INTERFACE THAT THE DEVICE IS IN THE STATE IN WHICH THE DEVICE IS AVAILABLE TO LOAD AN OPERATING SYSTEM SELECTABLE THROUGH THE USER INTERFACE ~530

FIG. 5

AN INDICATION IS SENT THROUGH A NETWORK TO A SERVER ~610

IF A FIRST INSTRUCTION RESPONSIVE TO THE INDICATION IS RECEIVED THROUGH THE NETWORK FROM THE SERVER, THE FIRST INSTRUCTION TO LOAD A FIRST SYSTEM, THEN THE FIRST SYSTEM IS LOADED FROM THE SERVER ~620

IF THE FIRST SYSTEM IS LOADED, THEN AN INDICATION THAT THE FIRST SYSTEM HAS BEEN LOADED IS SENT THROUGH THE NETWORK TO THE SERVER ~630

IF A SECOND INSTRUCTION RESPONSIVE TO THE INDICATION THAT THE FIRST SYSTEM HAS BEEN LOADED IS RECEIVED THROUGH THE NETWORK FROM THE SERVER, THE SECOND INSTRUCTION TO LOAD AN OPERATING SYSTEM SELECTED FROM A USER INTERFACE, THEN THE OPERATING SYSTEM IS LOADED FROM THE SERVER ~640

IF THE OPERATING SYSTEM IS LOADED FROM THE SERVER, THEN AN INDICATION THAT THE OPERATING SYSTEM HAS BEEN LOADED IS SENT THROUGH THE NETWORK TO THE SERVER ~650

FIG. 6

10027228-12001

IF A THIRD INSTRUCTION RESPONSIVE TO AN INDICATION TO RETURN THE DEVICE TO A STATE IN WHICH AN OPERATING SYSTEM HAS NOT BEEN SELECTED FOR THE DEVICE IS RECEIVED THROUGH THE NETWORK FROM THE SERVER, THE THIRD INSTRUCTION TO LOAD THE FIRST SYSTEM, THEN THE FIRST SYSTEM IS LOADED FROM THE SERVER ~710

IF THE FIRST SYSTEM IS LOADED FROM THE SERVER, THEN AN INDICATION THAT THE FIRST SYSTEM HAS BEEN LOADED IS SENT THROUGH THE NETWORK TO THE SERVER ~720

FIG. 7

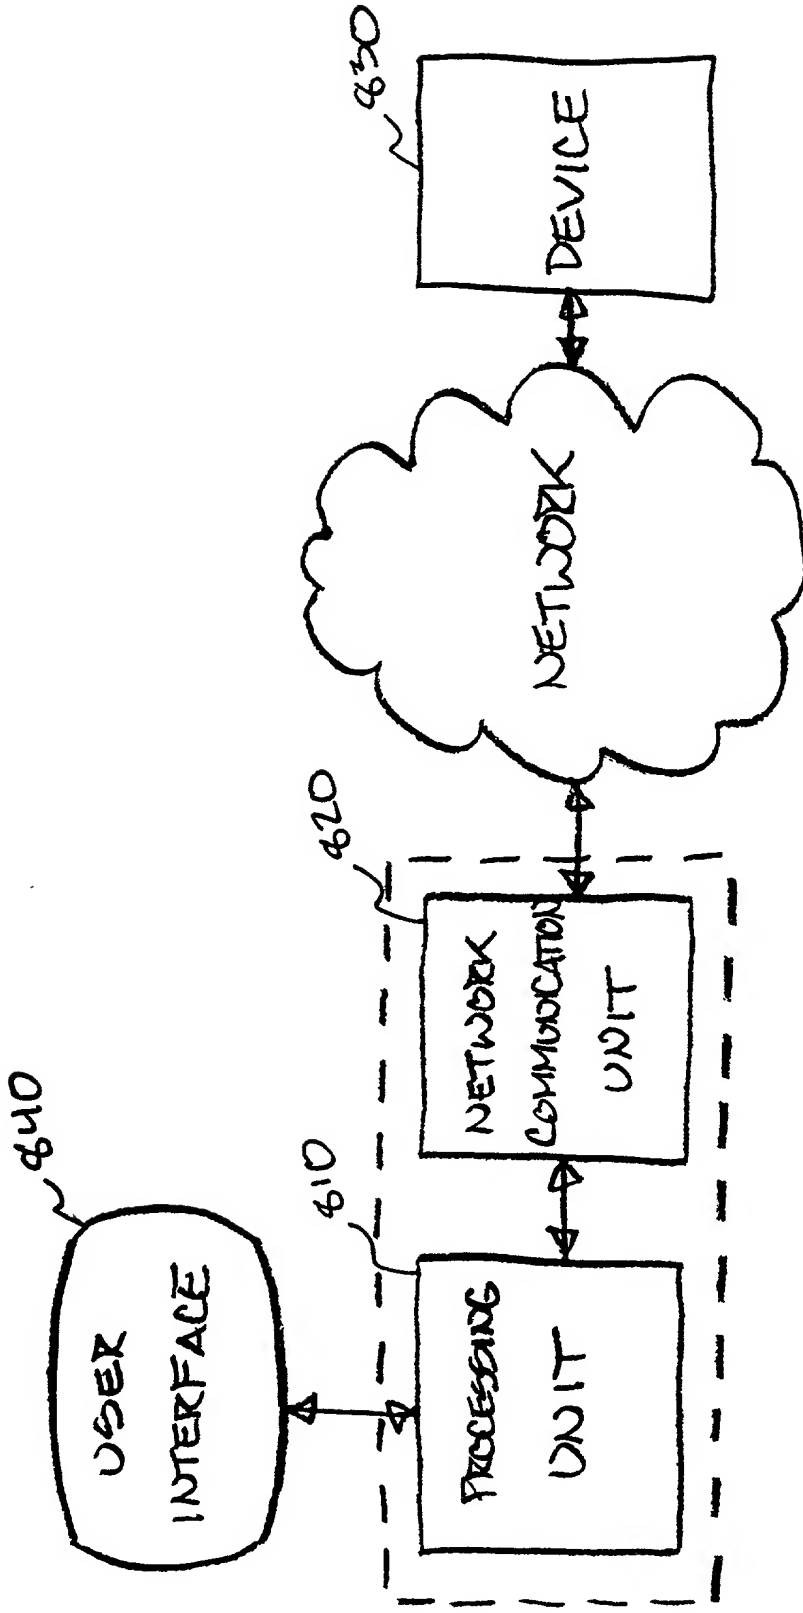


FIG. 8

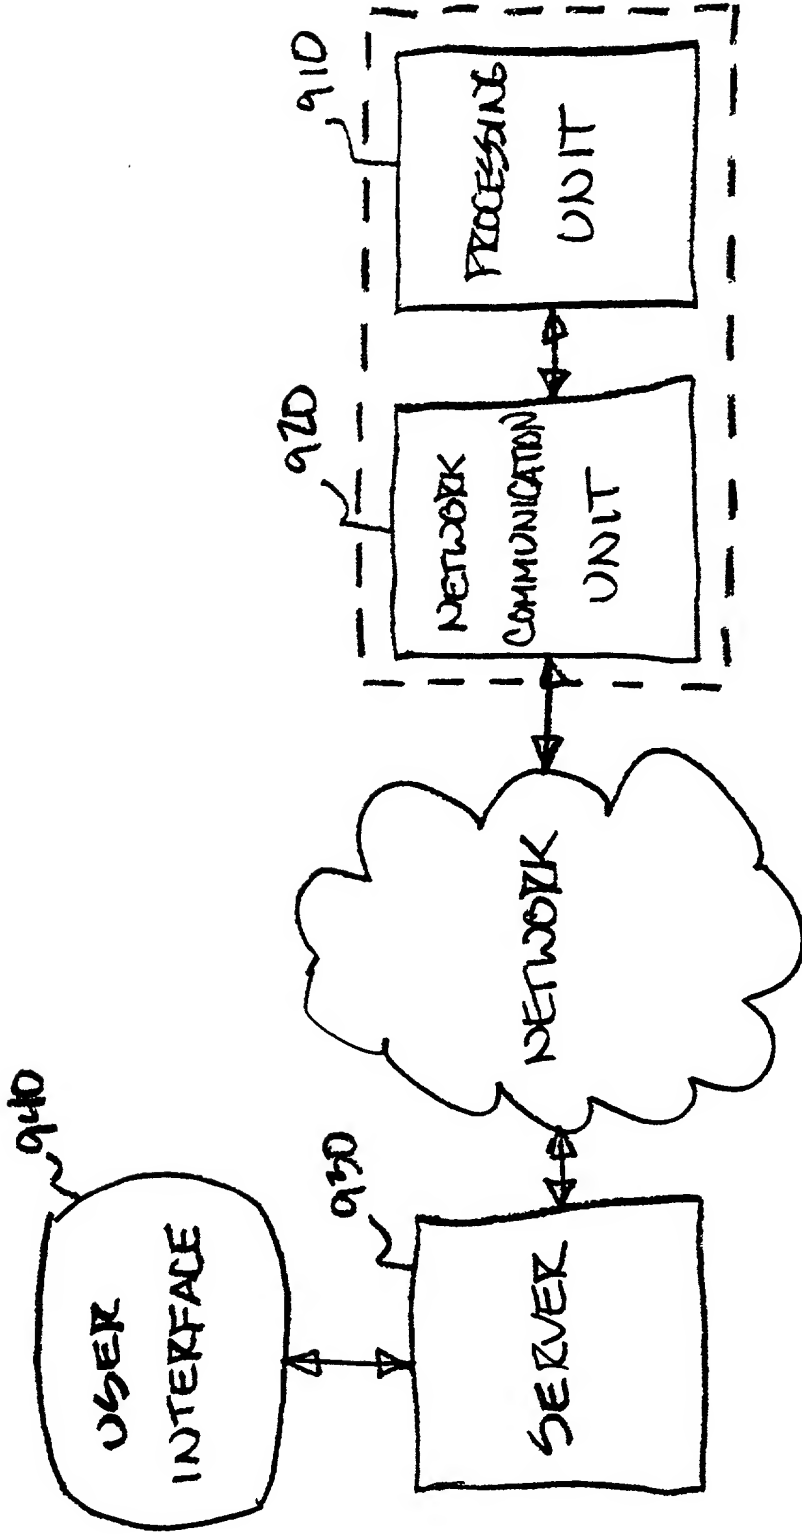


FIG. 9